

(12) **EUROPEAN!PATENT!APPLICATION**

(43)!Date!of!publication:  
**23.10.2002 Bulletin!2002/43**

(51)!Int!Cl.<sup>7</sup>: **A61!B!18/22, A61!C 1/00**

(21) Application!number: **02252310.4**

(22) Date!of!filing: **28.03.2002**

(84)!Designated!Contracting!States:  
**AT!BE!CH!CY!DE!DK!ES!FI!FR!GB!GR!IE!IT!LU!LU**  
**MC!NL!PT!SE!TR**  
Designated!Extension!States:  
**AL!LT!LV!MK!RO!SI**

(30) Priority: **29.03.2001 GB!0107853**

(71)!Applicant: **ASCLEPION-MEDITEC!LIMITED**  
**Inverkeithing,!Fife!KY11!1HZ!(GB)**


(72)!Inventors:  
• **Silk,!Graham!David**  
**Strathaven,!Scotland!ML10!6LJ!(GB)**  
• **Thomas,!Richard!Jolyon**  
**Dunfermline,!Scotland!KY11!9LA!(GB)**  
• **Lynch,!Bruce!Robert**  
**Glasgow,!Scotland!G12!0SE!(GB)**

(74)!Representative: **Murnane,!Graham!John!et!al**  
**Murgitroyd & Company**  
**165-169!Scotland!Street**  
**Glasgow!G5!8PL!(GB)**

(54) **Hand!apparatus!for!light!delivery**

(57) A!hand!apparatus!comprises!a!housing,!an!optical!connector! (20)! provided! in! the! housing! adapted! for connection! to! a! light! source! (3),! and! an! elongate! sleeve

(30). The!sleeve! (30)! has! a! light! emitter! (32)! at! one! end and! an! optical! carrier! (40)! extending! from! the! optical connector! (20)! to! the! light! emitter! (32).

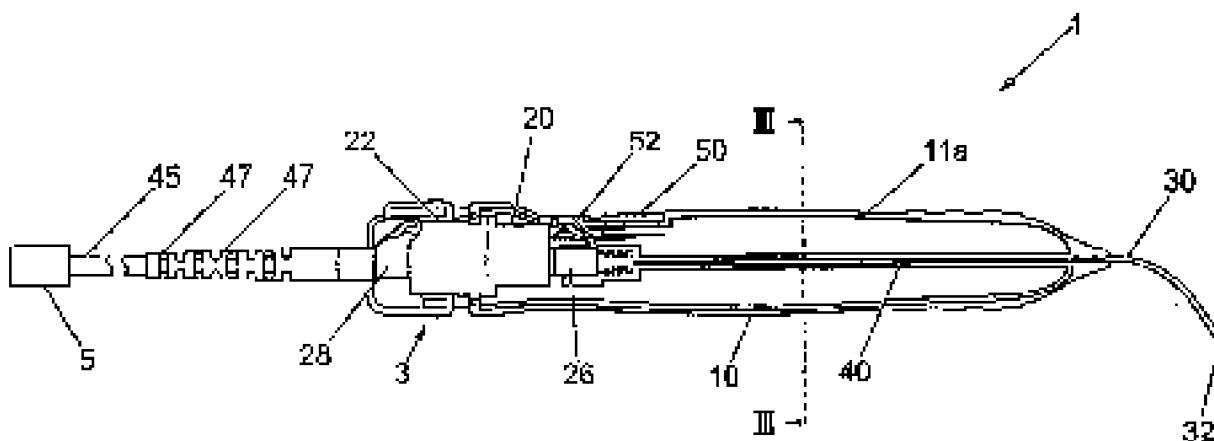

*Fig. 1*

## Description

**[0001]** This! invention! relates! to! a! hand! apparatus! for delivery! of! a! beam! of! light,! for! example! a! collimated! laser beam,! to! a! point! of! application.

In! particular! the! invention! relates! to! a! hand! apparatus for! delivery! of! a! laser! beam! to! a! point! of! application! on a! tooth! in! a! patient's! mouth.

**[0002]** Hand! pieces! are! used! in! medicine,! dentistry and! other! forms! of! treatment! to! apply! light! locally! to! an area! being! treated.! The! light! may! be! generated! at! a! base unit! and! transmitted! along! a! cable! to! a! fixed! hand! piece. Alternatively! the! base! unit! may! include! a! power! source, with! electrical! power! transmitted! along! a! cable! to! a! hand piece! to! generate! the! light! at! the! hand! piece! itself.! The flexible! cable! connection! allows! the! operator! of! the! hand piece! to! move! the! hand! piece! easily! to! the! required! point of! application.

**[0003]** The! known! hand! pieces! suffer! from! the! disadvantage! that! they! must! be! sterilised! between! uses.! The hand! pieces! contain! precise! optical! components,! so! that they! cannot! be! sterilised! in! the! way! that! mechanical! apparatus! can.! One! solution! is! to! provide! a! disposable sleeve! around! the! hand! piece.! The! sleeve! is! discarded and! replaced! between! uses! of! the! hand! piece.! However this! solution! suffers! from! the! disadvantage! that! the sleeve! cannot! be! totally! effective! in! eliminating! contamination! from! one! use! to! the! next.

**[0004]** It! is! an! object! of! the! present! invention! to provide! a! hand! apparatus! for! delivery! of! a! beam! of! light,! for example! a! collimated! laser! beam,! to! a! point! of! application,! wherein! the! apparatus! is! inexpensive! to! manufacture! and! simple! to! connect! to! a! light! source,! so! that! the hand! apparatus! can! be! used! as! a! single! use! apparatus, eliminating! the! requirement! to! sterilise! the! apparatus! for reuse.

**[0005]** According! to! a! first! aspect! of! the! present invention! there! is! provided! a! hand! apparatus! comprising! a housing,! an! optical! connector! provided! in! the! housing adapted! for! connection! to! a! light! source,! an! elongate sleeve! having! a! light! emitter! at! one! end,! and! an! optical carrier! extending! from! the! optical! connector! to! the! light emitter.

**[0006]** Preferably! the! optical! connector! is! a! male! or female! optical! connector! adapted! for! connection! of! optical! telecommunication! fibres.! Preferably! the! optical connector! includes! a! resiliently! biased! optical! coupler! to ensure! contact! between! the! optical! coupler! of! the! connector! and! the! light! source! to! which! it! is! to! be! connected.

**[0007]** The! apparatus! may! include! a! safety! means which! prevents! light! being! transmitted! if! the! optical! connector! is! disconnected! from! the! light! source.! Preferably the! apparatus! includes! a! switch! adapted! to! operate! a detent! member! which! allows! disconnection! of! the! connector! from! the! light! source! upon! operation! of! the switch.

**[0008]** The! light! emitter! may! be! an! isotip! emitter! of! the sort! described! in! United! States! Patent! No.! 5,073,402.

**[0009]** Preferably! the! housing! is! of! moulded! plastic. The! housing! may! be! provided! in! two! snap-fit! parts.! Preferably! the! housing! is! an! elongate! housing! and! includes means! for! retaining! the! optical! carrier! within! the! housing.! Preferably! the! retaining! means! is! adapted! to! permit longitudinal! movement! of! the! optical! carrier! relative! to the! channel! during! connection! of! the! connector! to! a! light source.

**[0010]** Preferably! the! retaining! means! includes! an! internal! channel! extending! from! the! connector! to! the sleeve.! Preferably! the! optical! carrier! extends! along! the channel.

**[0011]** Preferably! the! optical! carrier! includes! at! least one! optical! fibre.

**[0012]** The! apparatus! may! also! comprise! a! fluid! delivery! system.! Preferably! the! fluid! delivery! system! includes! a! reservoir,! a! fluid! outlet! adjacent! the! light! emitter,! and! a! conduit! connecting! the! reservoir! and! the! fluid outlet.! The! conduit! may! allow! the! passage! of! fluid! from the! fluid! reservoir! to! the! outlet! adjacent! the! light! emitter via! the! housing! and! the! sleeve.

**[0013]** Preferably! the! sleeve! is! a! resiliently! flexible sleeve.! The! sleeve! may! be! plastically! deformable! such that! an! operator! can! deform! the! sleeve! to! a! required shape.! Preferably! the! sleeve! is! adapted! to! permit! longitudinal! movement! of! the! optical! carrier! relative! to! the sleeve! upon! deformation! or! flexing! of! the! sleeve.! Preferably! the! sleeve! is! of! stainless! steel.

**[0014]** According! to! a! second! aspect! of! the! present invention! there! is! provided! a! light! delivery! system! comprising! a! light! source! and! a! hand! apparatus,! the! light source! including! a! first! optical! connector! and! the! hand apparatus! including! a! second! optical! connector,! wherein! the! first! and! second! optical! connectors! are! male! and female! optical! connectors! adapted! for! connection! of! optical! telecommunication! fibres.

**[0015]** Preferably! the! first! optical! connector! includes a! first! optical! coupler! and! the! second! optical! connector includes! a! second! resiliently! biased! optical! coupler! to ensure! contact! between! the! first! and! second! optical! couplers! when! the! first! and! second! optical! connectors! are connected.

**[0016]** The! light! delivery! system! may! include! a! safety means! which! prevents! light! being! transmitted! if! the! optical! connector! is! disconnected! from! the! light! source. The! safety! means! may! be! provided! on! the! light! source or! the! hand! apparatus.! Preferably! the! light! delivery! system! includes! a! switch! adapted! to! operate! a detent! member! which! allows! disconnection! of! the! first! and! second optical! connectors! upon! operation! of! the! switch.

**[0017]** Preferably! the! hand! apparatus! further! comprises! a! housing,! an! elongate! sleeve! having! a! light! emitter! at! one! end,! and! an! optical! carrier! extending! from! the second! optical! connector! to! the! light! emitter.

**[0018]** The! light! delivery! system! may! also! comprise! a fluid! delivery! system.! Preferably! the! fluid! delivery! system! includes! a! reservoir,! a! fluid! outlet! adjacent! the! light emitter,! and! a! conduit! connecting! the! reservoir! and! the

fluid outlet. The conduit may allow the passage of fluid from the fluid reservoir to the outlet adjacent the light emitter via the housing and the sleeve.

[0019] An embodiment of the invention will now be described, by way of example only, with reference to the accompanying figures, where:

Fig. 1 is a cross sectional view of a hand apparatus according to a first embodiment of the invention;

Fig. 2 is an isometric cross sectional view of the hand apparatus of Fig. 1;

Fig. 3 is a partial cross sectional view at III-III of the hand apparatus of Fig. 1;

Fig. 4 is an isometric view of the hand apparatus of Fig. 1; and

Fig. 5 is a partial enlarged view of the switch of the hand apparatus of Fig. 1.

[0020] Referring to Figs. 1 and 2 there is shown a hand apparatus 1 according to an embodiment of the present invention, comprising a housing 10, a second optical connector 20 provided in the housing 10 and adapted for connection to a light source 3, an elongate sleeve 30 having a light emitter 32 at one end, and an optical carrier 40 extending from the optical connector 20 to the light emitter 32.

[0021] The second optical connector 20 is connected to a first optical connector 22 provided in a connector housing 24. Both connectors 20, 22 are typically standard optical telecommunication connectors such as those manufactured by Stratos Lightwave. Standard connectors allow accurate optical coupling of the fibre ends within a low tolerance (typically 1 micron).

[0022] The first optical connector 22 is typically a female connector and the second optical connector 20 is typically a male connector. This ensures that no optical carriers 40 are exposed while the first optical connector 22 is connected to the light source 3 but not connected to the second optical connector 20.

[0023] The optical carrier 40 comprises a number of optical fibres arranged in a bundle and generally surrounded by a sheath (not shown). The light source 3 includes a light generator 5 and an optical cable 45 comprising a number of optical fibres within a shielding connecting the light generator 5 to the first optical connector 22 in the connector housing 24. The cable 45 may include ribs or thickened portions 47 adjacent to the hand apparatus for increased flexural strength, flexural stiffness and fatigue life.

[0024] A switch 50 is provided on the housing 10. The switch may be seen most clearly in Fig. 5. The switch 50 is connected through a slot 58 to a cam member 54. When the switch 50 is operated in the direction of arrow 60, the cam member 54 is driven forward in the direction

of arrow 60. This forward travel of the cam member 54 causes the hinged latch control member 56 to move downwardly and engage with a latch member 52 which also moves downwardly and causes the first optical connector 22 to decouple from the second optical connector 20. An abutment member 62 is also connected to the switch 50 and after a predetermined amount of forward movement, during which the optical connector 22 is decoupled as described above, abuts the first optical connector 22 causing the first and second optical connectors to separate. This separation provides a visible signal to the operator that the hand piece 1 can be removed from the light source 3. It is to be understood that the switch mechanism illustrated in Fig. 5 is only one possible switch mechanism and may be replaced by any suitable hand operated coupling and decoupling system.

[0025] A suitable safety means (not shown) may also be provided such that light may only be transmitted from the first optical coupler 22 if the first optical coupler 22 is connected to the second optical coupler 20. The safety means may be an electronic switch which is broken when the hand apparatus 1 is disconnected from the light source 3, causing an electronic signal to be sent along wires (not shown) in the cable 45 to turn off the light generator 5.

[0026] The housing 10 comprises two components 11 a, 11 b joined to each other using snap-fit connection or other suitable means. The housing 10 is typically manufactured from moulded plastic. The housing is substantially cylindrical in shape.

[0027] Fig. 3 shows one component 11a of the housing in cross section (at III-III in Fig. 1) and also the optical carrier 40. The housing, at this axial location, includes a web portion 14 extending from the outer circumference towards the centre. The web portion 14 divides into two split web portions 15, which together with the two split web portions 15 of the other component 11 a define a channel 16 in which the optical carrier 40 is supported in a way which allows transverse movement within the channel.

[0028] The ends 18 of the outer circumferential portion of the component 11a are profiled to allow snap-fit connection with correspondingly shaped ends 18 of the other component 11 b. When the two components 11 a, 11 b of the housing 10 are joined, the split web portions 15 of the two components of the housing 10 form a channel which houses the optical carrier 40 and extends along the axis of the housing 10 from the second optical connector 20 to the sleeve 30.

[0029] Fig. 4 shows the hand apparatus with the two components 11a, 11b of the housing 10 joined. At one region of the exterior surface of the housing 10 there is provided a grip portion 12 having an embossed surface. This region is typically located near the sleeve end of the housing.

[0030] Referring also to Figs. 1 and 2, the sleeve 30 is fixed at one end within the housing 10. At the other

end of the sleeve 30 is located the light emitter 32. The light emitter may be an isotropic optical emitter of the sort described in United States Patent No. 5,073,402.

[0031] The internal diameter of the sleeve 30 is substantially greater than the external diameter of the optical carrier 40. The sleeve 30 is typically made of stainless steel or other suitable metal. This allows the sleeve 30 to be permanently bent into a position desirable to the user. Because the optical carrier 40 is free to move longitudinally relative to the sleeve 30, bending the sleeve 30 causes no damage to the optical carrier 40.

[0032] The optical carrier 40 is constrained where it is joined to the second optical connector 20 and is fixed at the light emitter 32 but is otherwise unconstrained, and is free to move laterally within the channel 16 and within the sleeve 30. The optical carrier 40 is rigidly secured to the second coupler 26, which is mounted within the second connector 20 in a resiliently biased manner, in order to ensure a firm connection between the second coupler 26 and the first coupler 28, which is fixedly mounted in the first connector 22. When the first 22 and second 20 optical connectors are connected, the second coupler 26 moves longitudinally relative to the second connector 20 as it is brought into contact and pressed against the first coupler 28. It is therefore important that the housing accommodates relative longitudinal movement of the optical carrier 40, which is fixed to the second coupler 26, and the housing 10, which is fixed to the second connector 20. This relative longitudinal movement is accommodated by the fact that the channel 16 in which the optical carrier 40 sits is much wider than the carrier itself. Hence the carrier 40 is free to adopt a serpentine profile in order to accommodate the longitudinal movement of the end attached to the second coupler 16. The dimensions of the channel 16 typically allow up to 2 mm relative longitudinal movement.

[0033] The hand apparatus 1 as described is inexpensive to produce. It is intended that the hand apparatus 1 be a disposable unit. The light source 3, including the first optical connector 22 and the connector housing 24 and the associated cabling 45 are intended to be more permanent. The hand apparatus 1 can readily be disconnected from the light source 3 by simple separation of the first and second optical connectors 20, 22 and replaced by another hand apparatus. If required different types of hand apparatus 1 having different lengths of housing 10 and/or different lengths and/or shapes of sleeve 30 may also be provided.

[0034] The hand apparatus 1 may also be used to provide other functions, particularly dental functions. For instance, a fluid conduit (not shown) may also be provided within the housing 10 that supplies fluid, such as a mouthrinse, to a spout (not shown) located adjacent to the light emitter 32.

[0035] Modifications and variations to the invention described above are possible without departing from the scope of the invention.

## Claims

1. A hand apparatus comprising:

a housing;  
an optical connector provided in the housing adapted for connection to a light source;  
an elongate sleeve having a light emitter at one end, and an optical carrier extending from the optical connector to the light emitter.

2. A hand apparatus according to Claim 1, wherein the optical connector is a male or female optical connector adapted for connection to optical telecommunication fibres.

3. A hand apparatus according to Claim 1 or Claim 2, wherein the optical connector includes a resiliently biased optical coupler to ensure contact between the optical coupler of the connector and the light source to which it is to be connected.

4. A hand apparatus according to any preceding claim, including safety means adapted to prevent light being transmitted if the optical connector is disconnected from the light source.

5. A hand apparatus according to any preceding claim, wherein the apparatus includes a switch adapted to operate a detent member which allows disconnection of the connector from the light source upon operation of the switch.

6. A hand apparatus according to any previous claim, including retaining means for retaining the optical carrier within the housing, the retaining means being adapted to permit longitudinal movement of the optical carrier relative to the channel during connection of the connector to a light source.

7. A hand apparatus according to Claim 6, wherein the retaining means comprises an internal channel extending from the connector to the sleeve, the optical carrier extending along the channel.

8. A hand apparatus according to any preceding claim, including a fluid delivery system comprising:

a reservoir;  
a fluid outlet adjacent the light emitter; and  
a conduit connecting the reservoir and the fluid outlet, the conduit allowing the passage of fluid from the fluid reservoir to the outlet adjacent the light emitter via the housing.

9. A hand apparatus according to any preceding claim, wherein the sleeve is adapted to permit longitudinal movement of the optical carrier relative to

the! sleeve! upon! deformation! or! flexing! of! the  
sleeve.

10. A! hand! apparatus! according! to! any! preceding  
claim, wherein! the! sleeve! is! a! resiliently! flexible 5  
sleeve.

11. A! hand! apparatus! according! to! any! of! Claims! 1! to  
9,! wherein! the! sleeve! is! plastically! deformable. 10

15

20

25

30


35

40

45

50

55

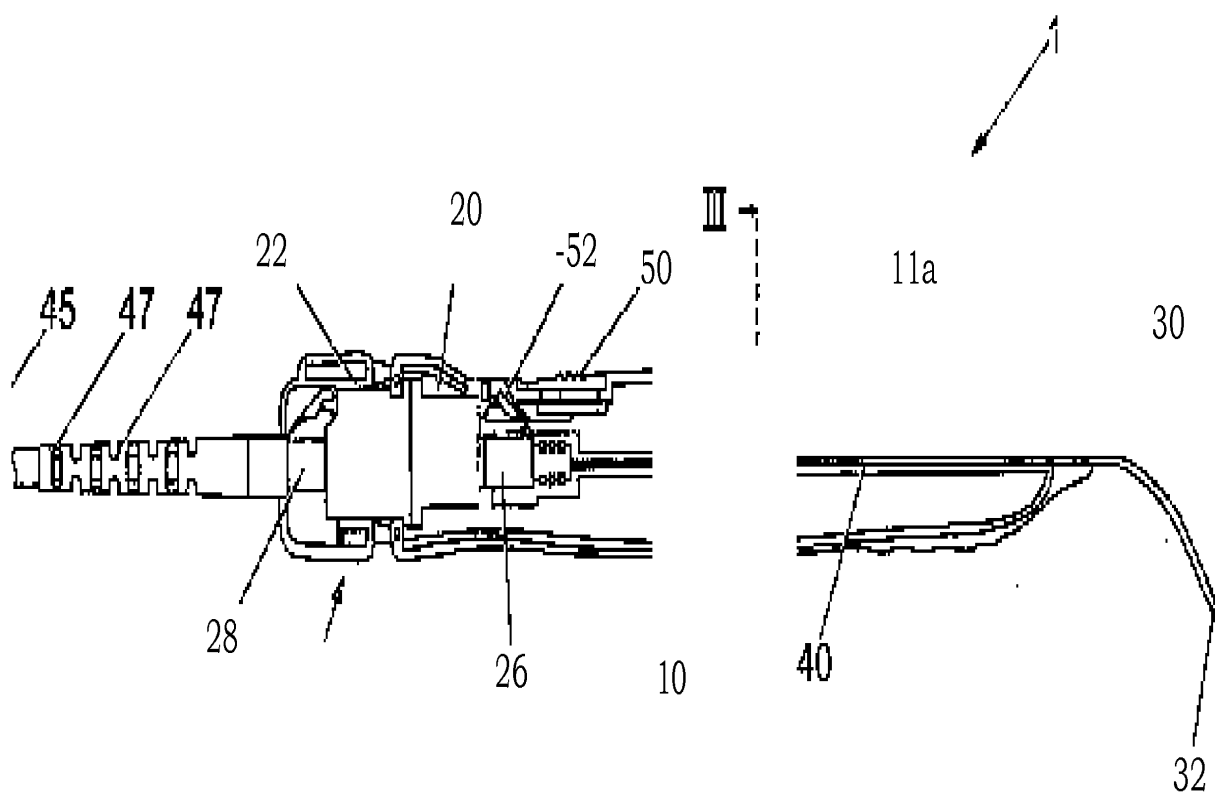

*Fig. I*

Fig. 3

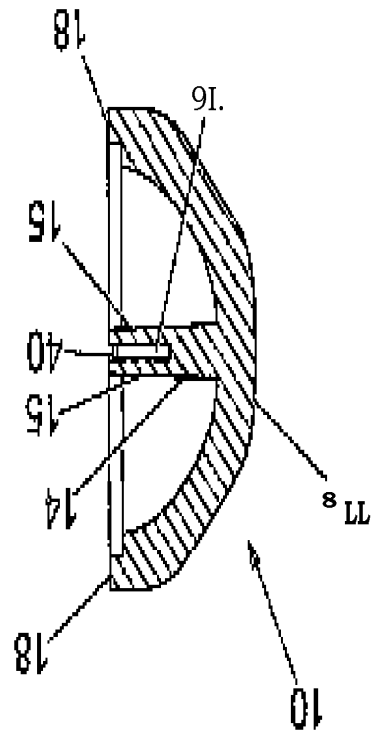


Fig. 2

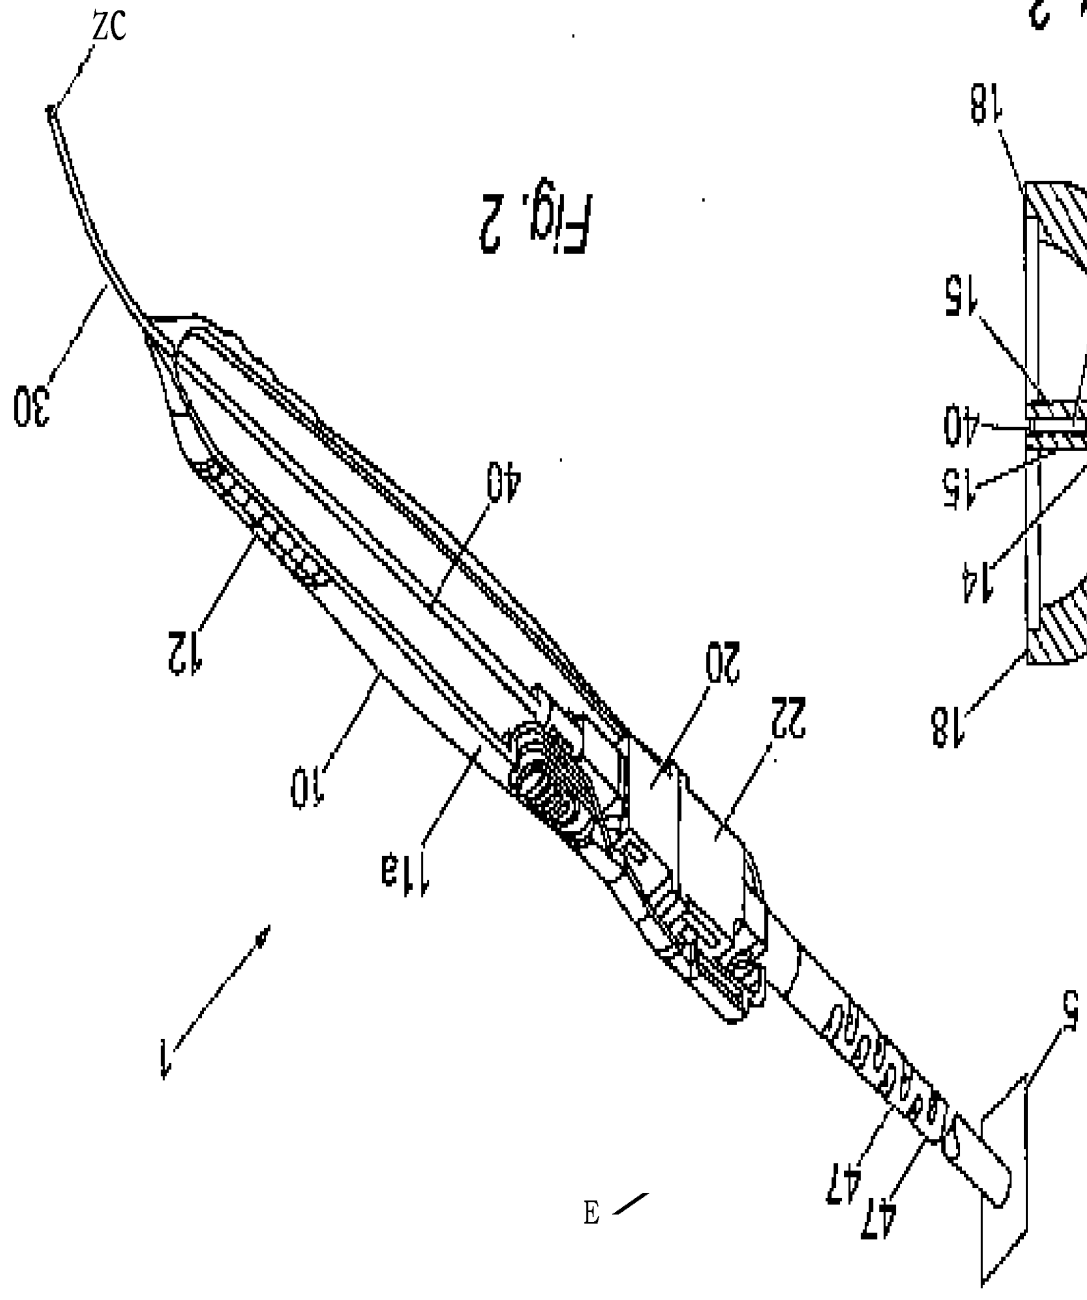


Fig. 5

9Z

0V ~

91.

0Z

Z9

~ 95

ZS

85 pg

0L

69

7Zl

50

10

11a

12

0E

ZE

3

45

47

5



(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
**30.10.2002 Bulletin 2002/44**

(51) Int. Cl. 7: **A61B 18/22, A61C 1/00**

(43) Date of publication A2:  
**23.10.2002 Bulletin 2002/43**

(21) Application number: **02252310.4**

(22) Date of filing: **28.03.2002**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE TR**  
 Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
 • **Silk, Graham David**  
**Strathaven, Scotland ML10 6LJ (GB)**  
 • **Thomas, Richard Jolyon**  
**Dunfermline, Scotland KY11 9LA (GB)**  
 • **Lynch, Bruce Robert**  
**Glasgow, Scotland G12 0SE (GB)**

(30) Priority: **29.03.2001 GB 0107853**


(71) Applicant: **ASCLEPION-MEDITEC LIMITED**  
**Inverkeithing, Fife KY11 1HZ (GB)**

(74) Representative: **Murnane, Graham John et al**  
**Murgitroyd & Company**  
**165-169 Scotland Street**  
**Glasgow G5 8PL (GB)**

(54) **Hand apparatus for light delivery**

(57) A hand apparatus comprises a housing, an optical connector (20) provided in the housing adapted for connection to a light source (3), and an elongate sleeve

(30). The sleeve (30) has a light emitter (32) at one end and an optical carrier (40) extending from the optical connector (20) to the light emitter (32).

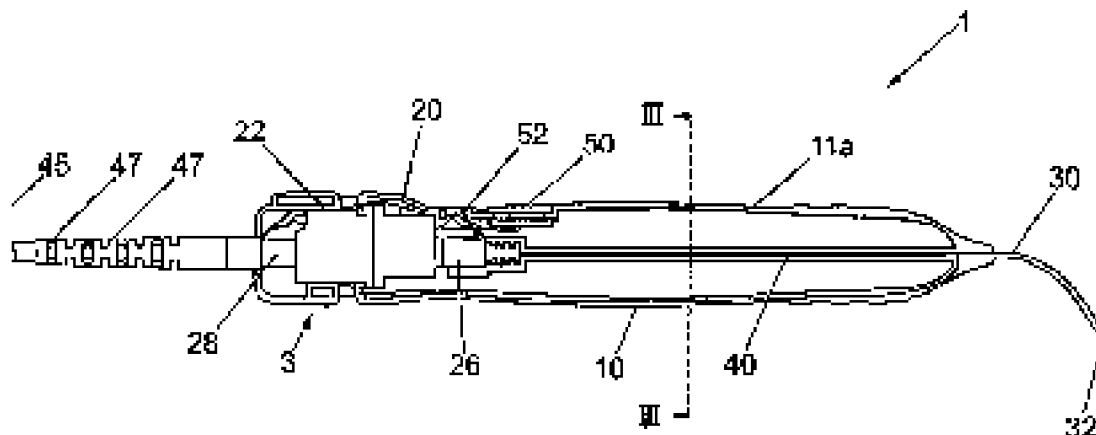

*Fig. 1*



European Patent  
Office

# EUROPEAN! SEARCH! REPORT

Application!Number  
EP! 02! 25! 2310

## DOCUMENTS! CONSIDERED! TO! BE! RELEVANT

Category	Citation!of!document!with!indication,!where!appropriate, of!relevant!passages	Relevant to!claim	CLASSIFICATION!OF!THE APPLICATION!(Int.Cl.7)
X	US! 4! 744! 624! A! (BURSTON! RONALD! J) 17! May! 1988! (1988-05-17) *! the! whole! document! *	1-5,7,8, 10,11	A61B18/22 A61C1/00
X	EP! 0! 882! 432! A! (SLT! JAPAN! KK) 9! December! 1998! (1998-12-09) * column 1, line 30-35! * *! column! 5, line! 33! -! column! 5, line! 35; figures! *	1,2,6-11	
X	US! 4! 895! 145! A! (JOFFE! STEPHEN! N ET! AL) 23! January! 1990! (1990-01-23) *! the! whole! document! *	1,2,6	
X	US! 5! 300! 061! A! (EASLEY! JAMES! C ET! AL) 5! April! 1994! (1994-04-05) *! the! whole! document! *	1,2,9,10	
X	US! 4! 884! 568! A! (HAHN! ANDREAS) 5! December! 1989! (1989-12-05) * column 2, line 43-54;! figure! 2! *	1,2	
The!present!search!report! has!been!drawn! up!for!all!claims			TECHNICAL!FIELDS SEARCHED (Int.Cl.7)
			A61B A61C
Place!of!search	Date!of!completion!of!the!search	Examiner	
MUNICH	27! August! 2002	Fouquet,! M	
CATEGORY!OF!CITED!DOCUMENTS		T!theory!of!principle!underlying!the!invention	
X!particularly!relevant!if!taken!alone		E!earlier!patent!document,!but!published!on,!or	
Y!particularly!relevant!if!combined!with!another		after!the!filing!date	
document!of!the!same!category		D!document!cited!in!the!application	
A!technological!background		L!document!cited!for!other!reasons	
O!non-written!disclosure		.....	
P!intermediate!document		A!member!of!the!same!patent!family,!corresponding	
		document	

123456789101112131415161718192021222324252627282930313233343536373839404142434445464748495051525354555657585960616263646566676869707172737475767778798081828384858687888990919293949596979899100

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

E 02 25 2310

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-08-2002

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 4744624	A	17-05-1988	DE	3622565 A1	08-01-1987
			FR	2584501 A1	09-01-1987
			GB	2177518 A1 , B	21-01-1987
			GB	2210706 A1 , B	14-06-1989
			JP	62078509 A	10-04-1987
-----					
EP 0882432	A	09-12-1998	US	5851112 A	22-12-1998
			EP	0882432 A1	09-12-1998
US 4895145	A	23-01-1990	US	4785805 A	22-11-1988
US 5300061	A	05-04-1994	NONE		
US 4884568	A	05-12-1989	DE	3723227 C1	20-10-1988
			DE	3835357 C1	01-03-1990
			JP	1029253 A	31-01-1989

N  
CC  
2  
O

W For more details about this annex, see Official Journal of the European Patent Office, No. 12/82